



SERIES OF THREE-PHASE ENERGY METERS IE38Mx

- COMPACT **THREE-PHASE** DIRECT CONNECTED **DIN-RAIL** MOUNTING METER.
- **CLASS B FOR ACTIVE ENERGY** AND **CLASS 2 FOR REACTIVE ENERGY**, MID APPROVED.
- MAXIMUM CURRENT **80 A** (I_{max}).
- VARIANTS: **2 x S0**, **S0 + RS485 (Modbus)**, **S0 + M-BUS**.
- **TARIFF INPUT**.
- SIDE **IR COMMUNICATION** FOR ADDONS.
- **NFC** FOR EASY SETTING AND READING.
- **70°C** AMBIENT OPERATIONAL TEMPERATURE.

FEATURES

- Three phase direct connected DIN-rail mounting meter.
- Class 1 for active energy according to EN 62053-21 and MID approval for class B according to EN 50470-3.
- Class 2 for reactive energy according to IEC 62053-23.
- Bidirectional energy measurement (import/export).
- Maximum current 80 A (I_{max}).
- Display segment Matrix LCD.
- Multifunctional front red LED.
- IR serial communication.
- Measurements of:
 - power (active/reactive/apparent),
 - energy (active/reactive/apparent, each phase and total),
 - voltage for each phase,
 - current for each phase,
 - phase to phase voltage
 - phase to phase angle,
 - frequency,
 - power factor (for each phase and total),
 - power angle (for each phase and total),
 - active tariff,
 - THD of voltage,
 - THD of current.
- 2nd multifunction pulse output (*valid only for IE38MS*).
- Modbus RS485 Serial communication (*valid only for IE38MD*).
- M-bus Serial communication (*valid only for IE38MM*).
- Tariff input (230 V AC).
- Tariff management (up to 6 tariffs manageable via communication).
- -25°C - 70°C ambient operation temperature.
- Limit control (Alarm) function can give info about exceeded conditions and trigger BICOM switch through IR communication.
- Sealable terminal cover.
- DIN-rail mounting according to EN 60715.
- 3 DIN modules width.

DESCRIPTION

The meters IE38Mx are intended for energy measurements in three-phase electrical power network and can be used in residential, industrial

and utility applications. Meter measures energy directly in 3-wire and 4-wire networks according to the principle of fast sampling of voltage and current signals. A built-in microprocessor calculates energy and other electrical quantities from the measured signals. It also controls LCD, LED, IR communication and optional extensions.

A capacitive touch button on the front of the energy meter enables access to switch between measurements and settings in the menu.

Connecting terminals can be sealed up against non-authorized access with protection covers. The meters are built to be fastened according to EN 60715 standard.

Meter has built-in optical (IR) communication port on the side. It can be used for controlling Bistable switch – BICOM or in combination with SG smart gateway (more info about BICOM and SG can be found on <https://www.iskra.eu/>).

The meter can be equipped with:

- **SO_{1,2} output** — intended for connection to the devices that are checking and monitoring consumed energy. The SO₂ output can be programmed as alarm output.
- **RS485 serial communication with the MODBUS protocol** — data is available in different formats prepared for easier integration into third party control and monitoring systems.
- **M-Bus serial communication** — which enables data transmission and thus connection of the measuring places into the network for the control and management with energy.
- **NFC communication** — implemented for parametrization as well as for reading data (e.g. counters, measurements, etc.) from the smart meter. Special application available from our internet site has to be used to perform such operations.
- **Tariff input** – provides measurement of two tariffs for selected energy registers.

Alarms are useful tool for fast detection of exceeded parameters, monitoring proper magnitude level and notification in combination with alarm outputs.

INSTALLATION

WARNING: Installation must be carried out and inspected by a specialist or under his supervision. When working on the meter, switch off the mains voltage! It is recommended to use 3x80 A fuse for the line protection.

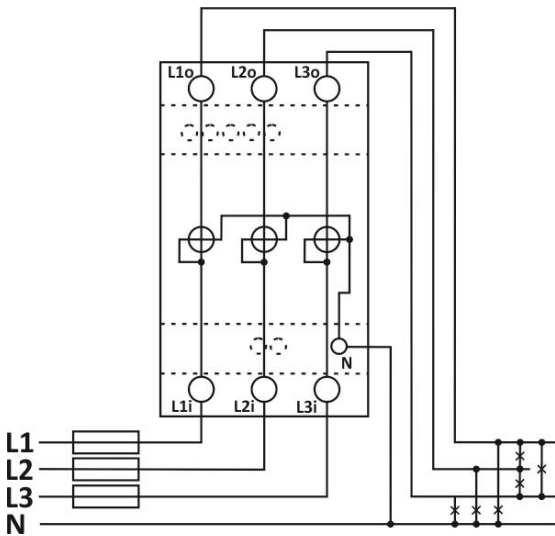


Figure 1: Three-phase 4-wire connection diagram (3W4)

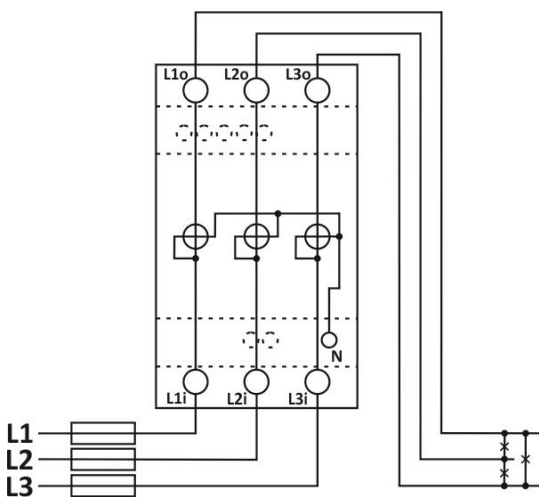


Figure 2: Three-phase 3-wire 3 system connection diagram (3W3)

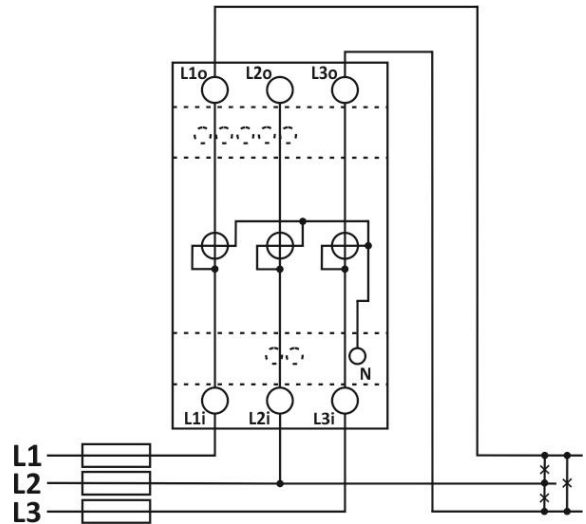


Figure 3: Three-phase 3-wire 2 system connection diagram (2W3)

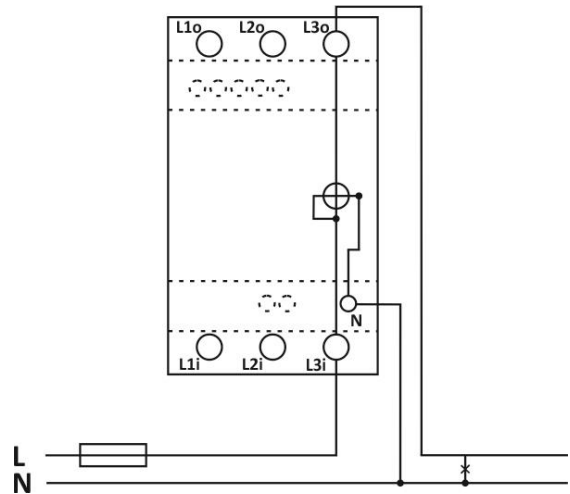


Figure 4: Single-phase connection diagram 1W

| Mark | Meaning |
|--------------------|---------------|
| L _{1,2,3} | Line input |
| N | Neutral input |

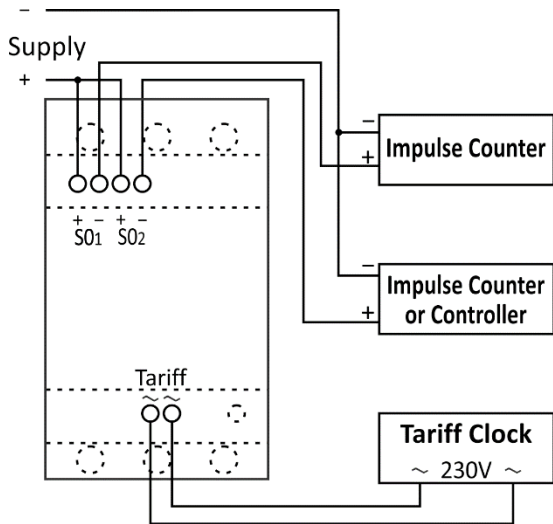


Figure 5: Connection diagram of S0 output, impulse counter, impulse counter or controller and tariff clock

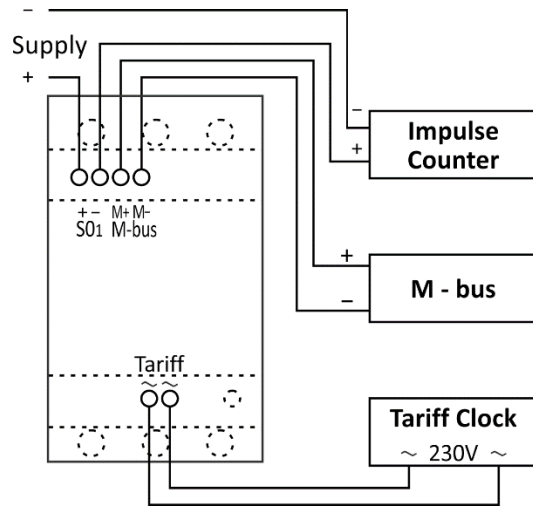


Figure 7: Connection diagram of S0 output, impulse counter, M - bus and tariff clock

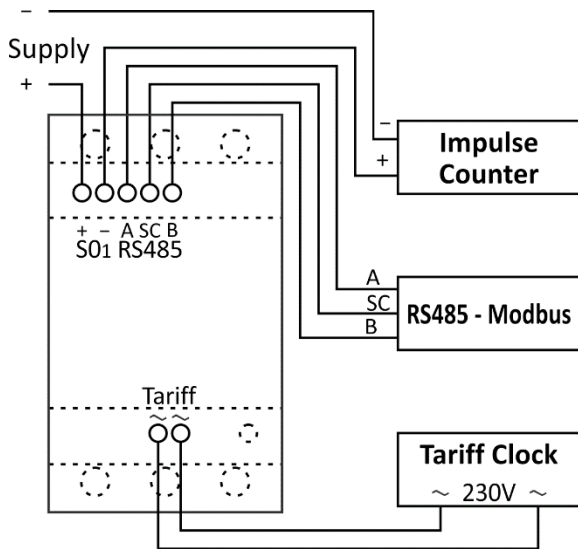


Figure 6: Connection diagram of S0 output, impulse counter, RS485 - Modbus and tariff clock

DIMENSIONAL DRAWINGS

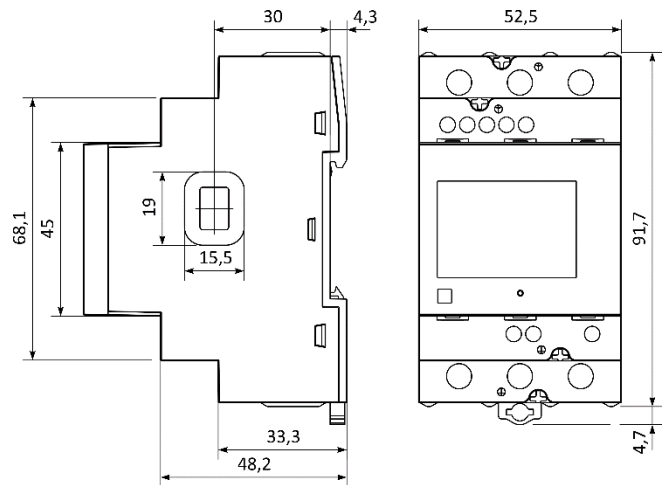


Figure 8: Dimensional drawing

TECHNICAL DATA

Rail mounting according DIN EN60715.

Mechanical characteristics of input:

Main inputs

- Contacts capacity:
Flexible (Rigid) 1.5 mm² ...25 (16) mm²
**Ferrule contact length should be 12 mm. Wire stripped to 14 mm.*
- Connection screws: M5
- Max torque: 3.5 Nm (PH2)
- Length or removed isolation: 10 mm

Auxiliary contacts

- Contact capacity: 0.05 mm²...1.5 mm²
- Screws: M3
- Max torque: 0.6 Nm
- Length or removed isolation: 8 mm

Measuring input:

| | |
|--|--|
| Type: | three-phase (3W4, 3W3, 2W3) single-phase (1W) |
| Reference (nominal) current (I_{ref}): | 5 A |
| Maximum current (I_{max}): | 80 A |
| Minimum current (I_{min}): | 0.25 A |
| Transitional current (I_{tr}): | 0.5 A |
| Starting current: | 20 mA |
| Power consumption at I_{ref} : | < 0.1 VA |
| Nominal voltage (U_n): | 3x230 V/400 V (-20 %...+15 %) |
| Power consumption per phase at U_n : | < 8 VA |
| Nominal frequency (f_n): | 50 Hz and 60 Hz |
| Minimum measuring time: | 10 s |

Accuracy:

Active energy:

- class 1 EN 62053-21
- class B EN 50470-3
- ± 1.5 % from I_{min} to I_{tr}
- ± 1 % from I_{tr} to I_{max}

Reactive, Apparent energy:

- class 2 IEC 62053-23
- ± 2.5 % from I_{min} to I_{tr}
- ± 2 % from I_{tr} to I_{max}

Voltage:

- ± 1 % of measured value

Current:

- ± 1 % of I_{ref} from I_{st} to I_{ref}
- ± 1 % of measured value from I_{ref} to I_{max}

Active Power:

- ± 1 % of nominal power ($U_n * I_{ref}$) from I_{st} to I_{ref}
- ± 1 % of measured value from I_{ref} to I_{max}

Reactive, Apparent power:

- ± 2 % of nominal power from I_{st} to I_{ref}
- ± 2 % of measured value from I_{ref} to I_{max}

Frequency:

- ± 0.5 % of measured value

LCD:

| | |
|---------------|--|
| Display type: | Matrix (128 x 64) |
| Illumination: | white (normal operation) red (alarm indication) |

LED:

| | |
|-------------|--------------------|
| Colour: | red |
| Pulse rate: | 1000 imp/kWh |
| LED on: | no load indication |

Pulse output SO_1 :

| | |
|-------------------------|-------------------|
| Pulse rate: | 500 imp/kWh |
| Pulse duration: | 32 ms \pm 2 ms |
| Rated voltage DC (max): | 27 V |
| Switched current (max): | 27 mA |
| Standard: | EN 62053-31 (A&B) |

Pulse output SO_2 (option):

| | |
|-------------------------|--------------|
| Type: | Programmable |
| Rated voltage DC (max): | 27 V |
| Switched current (max): | 27 mA |

Tariff input:

| | |
|-------------------|-----------------------|
| Rated voltage: | 230 V (-20 %...+15 %) |
| Input resistance: | 360 k Ω |

M-BUS Serial communication (option):

| | |
|-----------|--|
| Type: | M-bus |
| Speed: | 300 bit/s to 9600 bit/s (default 2400 bit/s) |
| Protocol: | M-bus |
| Address: | 0 – (default) |

RS485 Serial communication (option):

| | |
|-----------|---|
| Type: | RS485 |
| Speed: | 1200 bit/s to 115200 bit/s (default 115200 bit/s) |
| Frame: | 8, N, 2 |
| Protocol: | MODBUS RTU |
| Address: | 33 – (default) |

Optical IR communication (option):

| | |
|-------------|------------------------|
| Type: | IR |
| Connection: | via USB adapter |
| Speed: | 19200 bit/s |
| Frame: | 8, N, 2 |
| Protocol: | MODBUS RTU |
| Address: | 33 |
| Remark: | all settings are fixed |

NFC:

Protocol: ISO/IEC 14443 Part 2 and 3 compliant
Frequency range: 13.56 Mhz
Baudrate: 106 kbps
Operating distance: up to 15 mm from LCD
(distance depends on used reader)

Ambient conditions and Safety:

According standards for indoor active energy meters.

Temperature and climatic condition according to EN 62052-11:

- Dust/water protection IP50 (For IP51 it should be installed in appropriate cabinet.)
- Operating temp. range:
-25°C... +70°C (non-condensing humidity)
- Storage temp. range -40 °C... +85°C
- Enclosure material:
self-extinguish complying UL94 V
- Indoor meter: yes
- Degree of pollution: 2
- Protection class: II
- Installation category 300 V_{rms} cat.III
- Standard: IEC 62052-31

Mechanical environment: M1

Electromagnetic environment: E2

Humidity: non condensing

Max weight (with packaging): 225 g (258.5 g)

Installation: DIN Rail 35 mm

Dimensions (W x H x D):
52.5 mm x 91.7 mm x 68.2 mm

Package dimensions (W x H x D):
74 mm x 106 mm x 80 mm

Colour: RAL 7035

EU DIRECTIVES CONFORMITY

EU Directive on Measuring Instruments **2014/32/EU**.

EU Directive on EMC **2014/30/EU**.

EU Directive on Low Voltage **2014/35/EU**.

EC Directive WEEE **2002/96/EC**.

DISPOSAL




It is forbidden to deposit electrical and electronic equipment as municipal waste.
The manufacturer or provider shall take waste equipment free of charge.

ORDERING CODE

| | | |
|--------------|--------|---|
| 022433926000 | IE38MS | MID (IR, NFC) 2xS0, DUAL TARIFF, 80 A, 3-PM |
| 022433926100 | IE38MM | MID (IR, NFC, M-bus) S0, DUAL TARIFF, 80 A, 3-PM |
| 022433926200 | IE38MD | MID (IR, NFC, Modbus) S0, DUAL TARIFF, 80 A, 3-PM |

DICTIONARY:

| | |
|---------------|--|
| <i>RMS</i> | <i>Root Mean Square</i> |
| <i>TRMS</i> | <i>True Root Mean Square</i> |
| <i>AC</i> | <i>Alternating quantity</i> |
| <i>PF</i> | <i>Power factor</i> |
| <i>THD</i> | <i>Total harmonic distortion</i> |
| <i>MODBUS</i> | <i>Industrial protocol for data transmission</i> |
| <i>MiQen</i> | <i>ISKRA setting and acquisition Software</i> |
| <i>IR</i> | <i>Infrared (optical) communication</i> |
| <i>NFC</i> | <i>Near Field Communication</i> |
| <i>RTC</i> | <i>Real-time clock</i> |
| <i>MID</i> | <i>Measuring Instruments Directive</i> |
| <i>NC</i> | <i>Not connected</i> |
| <i>SC</i> | <i>Shield</i> |
| <i>SW</i> | <i>Software</i> |

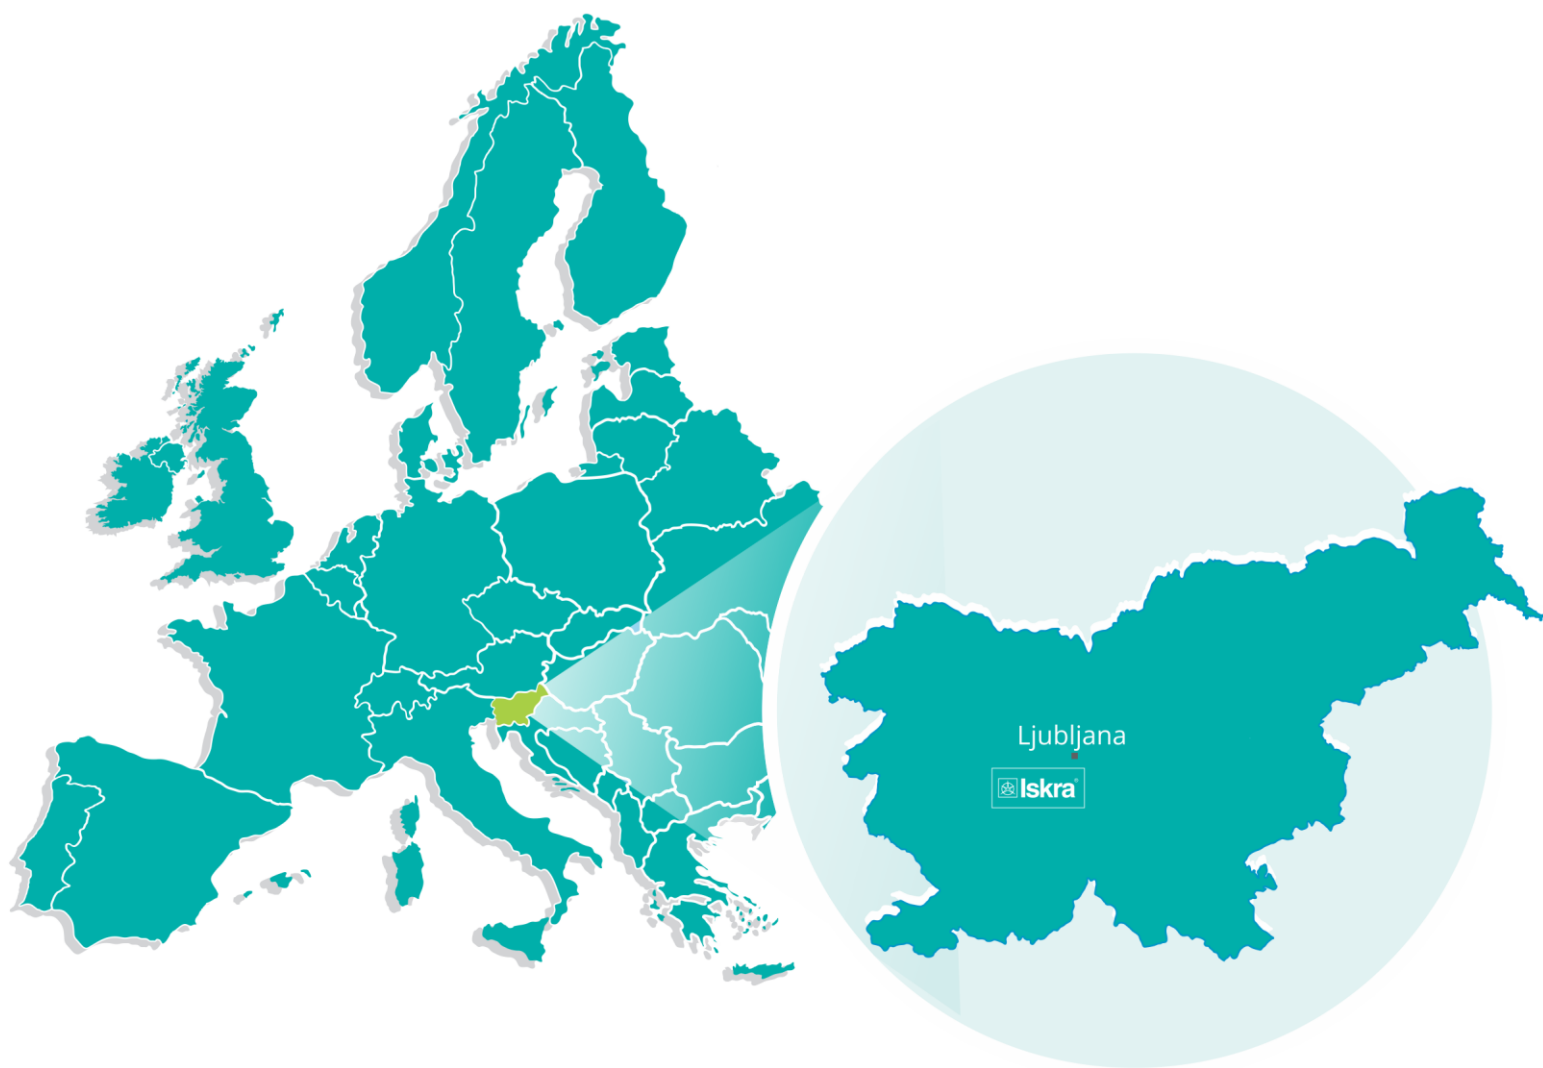

Iskra, d.o.o.
BU Ljubljana
 Stegne 21
 SI-1000, Ljubljana
 Phone: +386 1 513 10 00

Iskra, d.o.o.
BU Capacitors
 Vajdova ulica 71
 SI-8333, Semič
 Phone: +386 7 38 49 200

Iskra, d.o.o.
BU MIS
 Ljubljanska c. 24a
 SI-4000, Kranj
 Phone: +386 4 237 21 12

Iskra, d.o.o.
BU Batteries & Potentiometers
 Šentvid pri Stični 108
 SI-1296, Šentvid pri Stični
 Phone: +386 1 780 08 00

Iskra, d.o.o.
BU Electroplating
 Glinek 5
 SI-1291, Škofljica
 Phone: +386 1 366 80 50

Iskra IP, d.o.o.
 Vajdova ulica 71
 SI-8333, Semič
 Phone: +386 7 384 94 54

Iskra STIK, d.o.o.
 Ljubljanska cesta 24a
 SI-4000, Kranj
 Phone: +386 4 237 22 33

Iskra Lotrič, d.o.o.
 Ljubljanska c. 24a
 SI-4000, Kranj
 Phone: +386 4 237 21 12

Iskra ODM, d.o.o.
 Ljubljanska c. 24a
 SI-4000, Kranj
 Phone: +386 4 237 21 12

Iskra Tela L, d.o.o.
 Omladinska 66
 78250, Laktaši
 Phone: +387 51 535 890

Iskra Sistemi - M dooel
 Ul, Dame Gruev br. 16/5 kat
 1000, Skopje
 Phone: +389 75 444 498

Iskra Commerce, d.o.o.
 Hadži Nikole Živkoviča br. 2
 11000, Beograd
 Phone: +381 11 328 10 41

Iskra Hong Kong Ltd.
 33 Canton Road, T.S.T.
 1705, China HK City
 Phone: +852 273 00 917



Iskra, d.o.o.
 Stegne 21
 SI-1000 Ljubljana, Slovenia

Phone: +386 (0) 1 513 10 00
www.iskra.eu