



## *Measuring centers MC3x0 series*

### **Network recorders – MC350 & MC350H Multimeter – MC330 Energy meter – MC320**

- Voltage and current auto range measurements up to 600 V<sub>L-N</sub>, 12.5 A
- Active energy accuracy class 0.5S
- Up to four I/O modules (analogue output, pulse output, alarm output, tariff input)
- 4 Energy counters with tariff clock or tariff input
- Internal recorder 8MB
- MODBUS, DNP3, M-Bus or PROFIBUS DP-V0
- Certified ship version

## PROPERTIES

- Measurements of instantaneous values of more than 60 quantities (U, I, P, Q, S, PF, PA, f,  $\phi$ , THD, MD ...)
- Harmonics measurements up to 31<sup>st</sup> harmonic
- Measurements of minimum and maximum values
- 8 MB flash memory for recorder
- 4 Energy counters
- Accuracy class U, I, P ... 0.5
- Active energy Class 0.5S
- Frequency range from 16 Hz to 400 Hz
- Up to 4 I/O (two modules with 2 I/O):  
2 tariff inputs, 2 digital inputs, 2 digital outputs (SO or relay) or 2 analogue outputs
- AC or Universal (option) power supply
- Graphical LCD; 128 x 64 dots with illumination
- Automatic range of nominal current (max. 12.5 A) and voltage (600 V<sub>L-N</sub>)
- User-adjustable display of measurements
- Multilingual support
- Isolated communication RS485 or RS232 up to 115.200 bit/s, USB 2.0 or PROFIBUS up to 12Mbit/s
- MODBUS, DNP3, M-Bus or PROFIBUS DP-V0 communication protocol supported
- Tropical version according to DIN EN 40040
- Certified ship version
- MiQen – user-friendly PC software for setting via communication

## APPLICATION

The meter is intended for monitoring and measuring electrical quantities of single and three-phase electric energy system. It measures true TRMS value according to the principle of fast sampling of voltage and current signals. A built-in microprocessor calculates measurands (voltage, current, frequency, energy, power, power factor, phase angles, etc.) from the measured signals.

It records energy like the electricity meter in all four quadrants in up to four tariffs.

Since it also measures active and reactive power in all directions it can provide data about power direction (like ANSI code 32).

By using input/output modules it is possible to use meter for process control. Meter supports 2 optional I/O slots ready for use with double input or output modules. Available options are analogue output, digital output (open collector (SO) or mechanical relay) or tariff input. Digital output can be used as pulse or alarm output.

Alarms are useful tool for fast detection of exceeded parameters, monitoring proper magnitude level and notification in combination with alarm (relay) outputs. Thus function can be used for secondary over/under voltage/frequency protection, overload protection switch...

Internal memory (8MB) is used for recording of real time measurements and alarms, all equipped with a time stamp.

Various types of communication modules are available. Serial RS485, M-Bus or PROFIBUS can be used for connecting device in to the network, standard USB and serial RS232 for connection of device to computer or controller and service USB communication (not galvanic separated) that can be used for a fast set-up without need for auxiliary power supply.

Available combinations, supported functions and types can be seen in options table.

Special “ship version” is available, certified by Bureau Veritas.

## PROGRAMING

Complete programming of a meter and downloading and analysing of stored data can be done via communication with user friendly MiQen software (free download from Iskra d.d. web page).

Setting of basic functions and navigation through illuminated LCD can easily be done via 5 buttons placed on the meter front panel.

## DESCRIPTION OF PROPERTIES

### Measurands

- True TRMS values of currents and voltages (MC330, MC350, MC350H only)
- Active, reactive, apparent power and power factor (MC330, MC350, MC350H only)
- Energy in all 4 quadrants
- THD values of current and voltage (MC330, MC350, MC350H only)
- Harmonics up to 31<sup>st</sup> on current and voltage (MC350H only)
- Minimum and maximum values (MC350H only)

### Memory (MC350, MC350H only)

A built-in recorder (8Mb) enables storing of up to 32 measurements (two partitions) and detected alarms all equipped with a time stamp.

Sampling time of measurements recorder can be set from 1 to 60 min. Minimum, maximum, average or actual value of selected quantity can be stored.

### Alarms (MC330, MC350, MC350H only)

The meter supports setting of up to 16 alarms that are divided in to two alarm groups. Alarms can be set for any of measured parameters by setting condition and a limit value. A time constant of maximum demand values in a thermal mode, a delay time and switch-off hysteresis are defined for each group of alarms. To each of two alarm groups an alarm output (solid-state or electromechanical relay) can be dedicated.

### Communication

Meter can be equipped with communication module. Different options are possible:

- Serial RS485
- Serial RS232
- USB 2.0 (MC330, MC350, MC350H only)
- PROFIBUS + Service USB (MC330, MC350, MC350H only)
- M-Bus (MC350, MC350H only)
- Service USB (MC320, MC330 only)

Service USB communication uses USB Mini-B type connector that is not galvanic separated. Advantage is that in this case meter do not need a power supply to communicate. Communication via service USB communication is time limited.

When using service USB communication, power supply and measuring voltages needs to be disconnected.

All devices with PROFIBUS communication are equipped also with service USB communication.

### Input/Output modules

The modules are available with double inputs/outputs. Each module has three terminals.

The meter is available without, with one or with two modules. The following modules are available:

- Pulse (digital) output (S0) 2 outputs
- Relay output (MC330, MC350, MC350H only) 2 outputs
- Analogue output (MC350, MC350H only) 2 outputs
- Tariff input 2 inputs
- Digital input (MC330, MC350, MC350H only) 2 inputs

Pulse (digital) output module is available as:

Pulse output according EN 62053-31 (27 V, 27 mA)

### Aux power supply

Standard AC power supply enables connection of the meter to a specific AC voltage (57.7 / 63.5 ... V).

There are also two options with a universal power supply:

- Full range - DC (20–300 V) or AC (48–276 V / 40-65 Hz) voltage
- High range - DC (100–265 V) or AC (85–265 V / 40-65 Hz) voltage (MC350, MC350H only)

### Data display

Data are displayed on 128 x 64 dot graphic LCD with illumination (37 x 69 mm). An indication symbols on the front side are optical LED for energy flow and active alarm (MC330, MC350, MC350H only).

### Miqen

User friendly MiQen software is intended for supervision of the meter on PC. It enables easy parameterisation of the network and the meter, displaying and recording of real time values, downloading and analysis of stored data via the serial, USB or Ethernet communication. The information and stored measurements can be exported in standard Windows formats. MiQen is multilingual software and it functions on Windows 8, 7, XP, NT, 2000 operating systems. MiQen can be downloaded from *Iskra*, d.d. webpage [www.iskra.eu](http://www.iskra.eu).

## TECHNICAL DATA

### Measurement inputs

#### VOLTAGE MEASUREMENTS:

Measuring range	10 ... 600 V <sub>LN</sub>
Nominal voltage(U <sub>N</sub> )	50 ... 500 V <sub>LN</sub>
Max. measured value (cont.)	600 V <sub>LN</sub> ; 1000 V <sub>LL</sub>
Overload	2 × U <sub>N</sub> ; 10 s
Consumption	< 0.1 VA
Input impedance	3.3 MΩ per phase

#### CURRENT MEASUREMENTS:

Measuring range	0.01 ... 10 A
Nominal current (I <sub>N</sub> )	1 / 5 A
Max. measured value	12.5 A sinusoidal
Max. allowed value (thermal)	15 A cont.
Overload	20 × I <sub>N</sub> ; 1s

#### FREQUENCY MEASUREMENT

Frequency measuring range (Only for frequency meas.)	16 ... 400 Hz (on comm.) f <sub>N</sub> ± 30 Hz (on analogue out)
Nominal frequency (f <sub>N</sub> )	50/60 Hz
Optional nominal frequencies	16.6, 200, 400 Hz

### Basic accuracy under reference conditions

Accuracy is presented as an accuracy class according to EN 61557-12 except when it is stated as an absolute value

Measurand	Accuracy class
Rms current (I1, I2, I3, Iavg, I <sub>n</sub> )	0.5
Voltage Rms P-N and P-P	0.5
Power (P, S)	0.5
Reactive power (Q)	1
Power factor (PF)	0.5
Frequency (f)	10 mHz
P-N and P-P angle	0.5°
THD (U), THD (I) (0 ... 400 %)	0.5 %
Active energy	EN 62053-21 Class 1
Active energy	EN 62053-22 Class 0.5S
Reactive energy	EN 62053-23 Class 2
Pulse output	EN 62053-31 Class A & B

### Communication

#### SERIAL COMMUNICATION RS232

Connection type	Direct
Insulation	Protection class II 3.5 kV AC TRMS 1 min
Max. connection length	3 m
Transfer mode	Asynchronous
Protocol	MODBUS RTU / DNP3
Transfer rate	2.4 kBaud to 115.2 kBaud

**SERIAL COMMUNICATION RS485**

Connection type	Network
Insulation	Protection class II 3.5 kV AC TRMS 1 min
Max. connection length	1000 m
Transfer mode	Asynchronous
Protocol	MODBUS RTU / DNP3
Transfer rate	2.4 kBaud to 115.2 kBaud

**PROFIBUS COMMUNICATION**

Connection type	Network
Insulation	Protection class II 2.5 kV AC TRMS 1 min
Max. connection length	As per PROFIBUS-DP networks
Transfer mode	DP-V0
Transfer rate	9.6 kBaud to 12 MBaud

**M-BUS COMMUNICATION**

Connection type	Network
Insulation	Protection class II 2.5 kV AC TRMS 1 min
Max. connection length	1000 m
Transfer mode	Asynchronous
Protocol	M-Bus
Transfer rate	300Baud to 9600Baud

**USB COMMUNICATION**

Connection type	Direct
Max. connection length	5 m
Insulation	Protection class II 3.5 kV AC TRMS 1 min
Insulation – Service USB communication (see warning below)	Protection class I 2.2 kV AC TRMS 1 min
Transfer mode	Asynchronous
Protocol	MODBUS RTU / DNP3
Transfer rate	USB 2.0

**Warning!**

Service USB communication is provided with only BASIC insulation and can ONLY be used unconnected to aux. supply AND power inputs.

**INPUT / OUTPUT modules**
**ELECTROMECHANICAL RELAY OUTPUT (MC330, MC350, MC350H)**

Purpose	alarm, pulse, general purpose digital output
Type	Electromechanical Relay switch
Rated voltage AC	250 V AC
Max. switching current AC	1000 mA AC
Rated voltage DC	250 V DC
Max. switching current DC	200 mA DC (valid for resistive load)
Contact resistance	≤ 100 mΩ (100 mA, 24V)
Pulse (if used as pulse output)	Max. No.4000 imp/hour Min. length 100 ms
Insulation voltage	
Between coil and contact	4 kV AC TRMS
Between contacts	1 kV AC TRMS

**PULSE (DIGITAL) OUTPUT (SO)**

Purpose	pulse, alarm, general purpose digital output
Type	Optocoupler open collector switch
Rated voltage	40 V AC/DC
Max. switching current	30 mA (RONmax = 8Ω)
Pulse length (if used as pulse output)	programmable (2 ... 1000 ms)

**TARIFF INPUT**

Rated voltage	230 V ± 20 % AC/DC 75 ... 110 V AC/DC
Max. current	< 0.6 mA
Frequency range	45 ... 65 Hz
ON voltage	40 ... 120 % of rated voltage
OFF voltage	0 ... 10 % of rated voltage

**DIGITAL INPUT (MC330, MC350, MC350H)**

Rated voltage	230 V ± 20 % AC/DC 75 ... 110 V AC/DC 24 V DC
Max. current	< 0.6 mA
Frequency range	45 ... 65 Hz
ON voltage	40 ... 120 % of rated voltage
OFF voltage	0 ... 10 % of rated voltage

**ANALOGUE OUTPUT (MC350, MC350H)**

**Note!**

Analogue output is available only in combination with High range Universal power supply.

Output range	0 ... 20 mA
Accuracy	0.5 % of range
Maximum load	150 Ω
Max. voltage on output (open circuit current output)	5 V
Linearization	Linear, Quadratic
Max. No. of break points	5
Output value limits	120% of nominal output
Response time of analogue output	Depends on set Average interval (8 – 256 periods)
Residual ripple	< 1 % p.p.

All outputs may be either short or open-circuited. They are electrically insulated from all other circuits. Output range value can be altered subsequently (zoom scale) using the setting software, but a supplementary error results.

**INTRINSIC-ERROR (FOR ANALOGUE OUTPUTS)**

For intrinsic-error for analogue outputs with bent or linear-zoom characteristic multiply accuracy class with correction factor (c). Correction factor c (the highest value applies):

Linear characteristic


$$c = \frac{1 - \frac{y_0}{y_e}}{1 - \frac{x_0}{x_e}} \quad \text{or} \quad c = 1$$

Bent characteristic

$$x_{b-1} \leq x \leq x_b$$

b – number of break point (1 to 5)

$$c = \frac{y_b - y_{b-1}}{x_b - x_{b-1}} \cdot \frac{x_e}{y_e} \quad \text{or} \quad c = 1$$

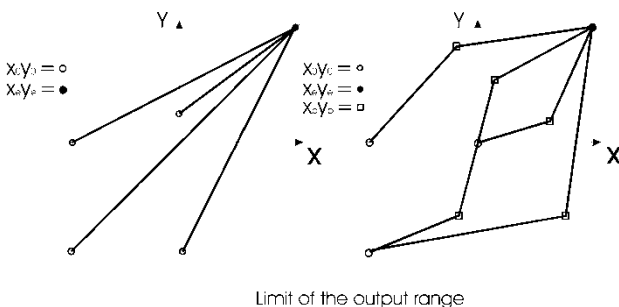

**AUX POWER SUPPLY**

**UNIVERSAL SUPPLY – FULL RANGE**

Nominal voltage AC range	48 ... 276 V
Nominal frequency range	40 ... 65 Hz
Nominal voltage DC range	20 ... 300 V
Consumption	< 3.5 VA

**UNIVERSAL SUPPLY – HIGH RANGE (MC350, MC350H)**

Nominal voltage AC range	85 ... 265 V
Nominal frequency range	40 ... 65 Hz
Nominal voltage DC range	100 ... 265 V
Consumption	< 3.5 VA
Power-on transient current	< 20 A; 3 ms

**AC POWER SUPPLY**

Nominal voltage AC	57.7 / 63.5 / 100 / 110 / 230 / 240 / 400 / 440 / 500 V
Nominal frequency range	40 ... 65 Hz
Consumption	< 3.5 VA

**SAFETY**

Protection	protection class II <b>600 V rms, installation category II</b> <b>300 V rms, installation category III</b> pollution degree 2 in compliance with <b>EN 61010-1</b>
Enclosure material	PC/ABS incombustibility–self-extinguishability complying with <b>UL 94 V-0</b>
Enclosure protection	IP 52 front side IP 00 for terminals (IP20 with protection cover) in compliance with <b>EN 60529</b>

**ENVIRONMENTAL CONDITIONS**

Ambient temperature	usage group III
Operating temperature	- 10 to +60 °C
Storage temperature	- 40 to +70 °C
Maximum humidity	≤ 95% r.h. non-condensing
Altitude	≤ 2000 m

**EU DIRECTIVES**

Directive 2014/35/EU on low voltage.  
Directive 2014/30/EU on electromagnetic compatibility.  
Directive on RoHS 2011/65/EU.

**TERMINALS**

Connection	Max. conductor cross-sections
Voltage inputs (4)	2.5 mm <sup>2</sup> with pin terminal 4 mm <sup>2</sup> solid wire
Current inputs (3)	≤ Ø 6 mm; one conductor with insulation
Power supply (2)	≤ 2.5 mm <sup>2</sup> ; one conductor
Modules (3 each)	≤ 2.5 mm <sup>2</sup> ; one conductor

**MECHANICAL**


Vibration withstand	0.7g, 3 ... 100 Hz
Mounting	Pannel mounting
Cutting for installation:	92 <sup>+0,8</sup> mm acc. to DIN EN 50 022
Weight (max)	500 g

**CONNECTION**


**System:**

Voltage inputs can be connected either directly to low-voltage network or via a high-voltage transformer to high-voltage network.

Current inputs can be connected either directly to low-voltage network or shall be connected to network via a corresponding current transformer (with standard 1 A or 5 A outputs).

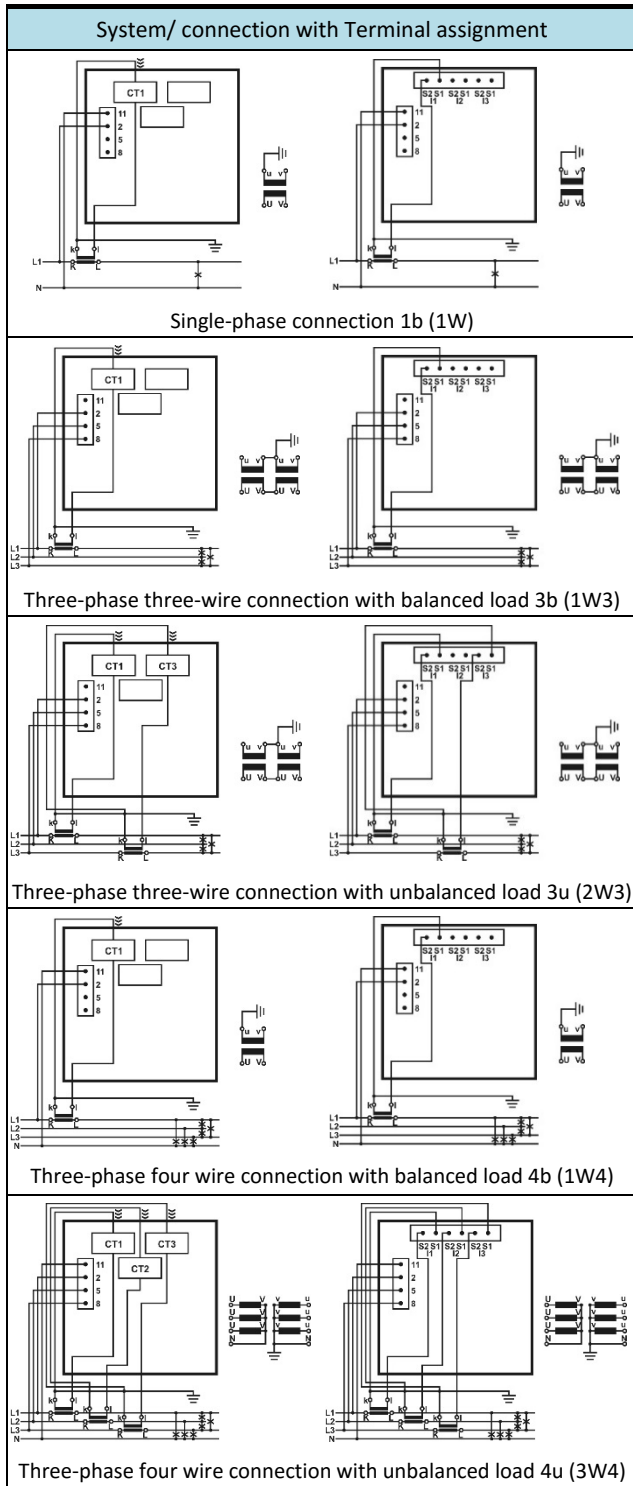



**DIMENSIONAL DRAWING**

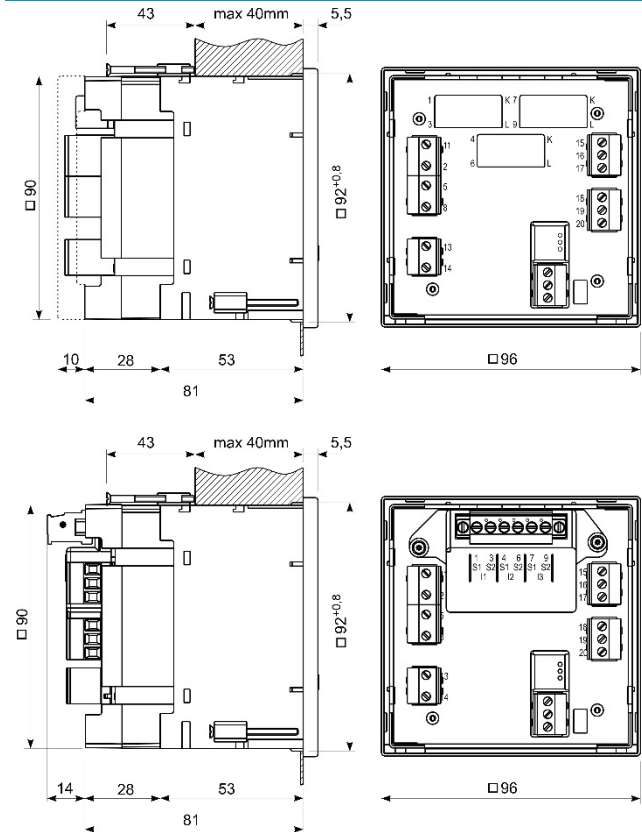

**CONNECTION TERMINALS AND MARKINGS**

Function		Connection		
Measuring input	AC current	IL1	CT1	
		IL2	CT2	
		IL3	CT3	
	AC voltage	UL1	2	
		UL2	5	
UL3		8		
N		11		
Inputs / outputs	I/O 1, 2	I/O - 1	15	
		Common (1, 2)	16	
		I/O - 2	17	
	I/O 3, 4	I/O - 3	18	
		Common (3, 4)	19	
		I/O - 4	20	
Auxiliary power supply		+ / AC (L)	13	
		- / AC (N)	14	
Communication	RS232/RS485 /M-Bus	Rx / A / M+	21	
		GND / C / NC	22	
		Tx / B / M-	23	
	PROFIBUS	D-SUB 9pin	3 - A	
			8 - B	
			6 - 5V	
			5 - GND	
			4 - RTS	
	USB		USB type B	
	Service USB		Mini USB	



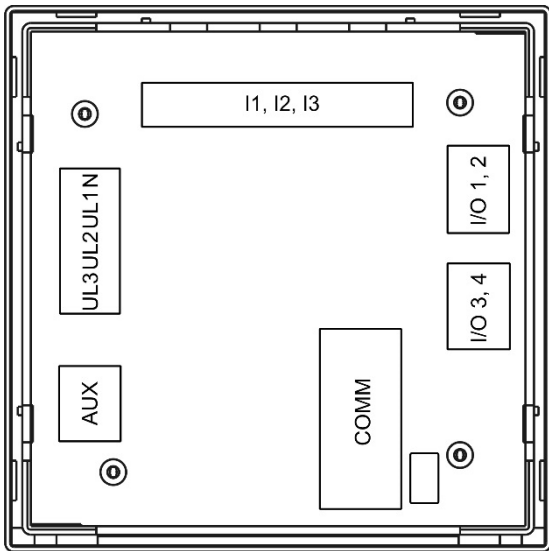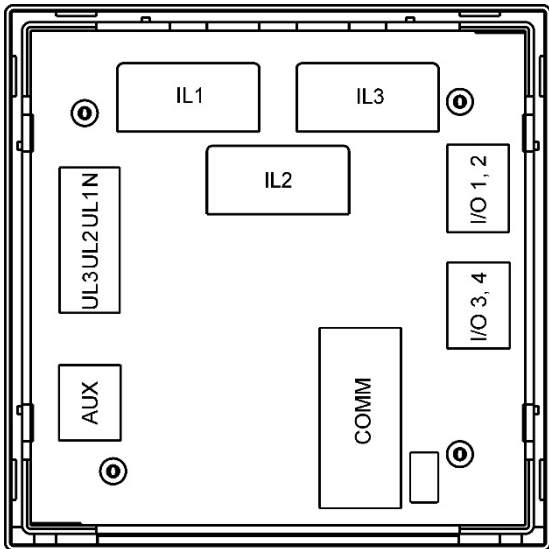

### COMPLIANCE WITH STANDARDS

Standard EN	Description
61557-12	Electrical safety in low voltage distribution systems up to 1000 V a.c. and 1500 V d.c. - Equipment for testing, measuring or monitoring of protective measures
61010-1	Safety requirements for electrical equipment for measurement, control and laboratory use
62053-21*	Electricity metering equipment (a.c.) Particular requirements
62053-22*	Electricity metering equipment (a.c.) Particular requirements
62053-23*	Electricity metering equipment (a.c.) Particular requirements
62053-31*	Electricity metering equipment (a.c.) Particular requirements
61326-1	EMC requirements for electrical equipment for measurement, control and laboratory use Part 1: General requirements
60529	Degrees of protection provided by enclosures (IP code)
UL 94	Tests for flammability of plastic materials for parts in devices and appliances
IEC 61158	Industrial communication networks – Fieldbus specifications (Type 3)
13757	Communication system for and remote reading of meters

\* - Partial compliance

## DATA FOR ORDERING

---

When ordering the meter, all required specifications shall be stated in compliance with the ordering code. Also additional information could be stated if needed. Most typical options are shown as an example.

## EXAMPLE OF ORDERING

The MC350 meter is connected to secondary phase voltage up to 500 V<sub>L-N</sub> and 5 A secondary current. There are no special requirements for energy accuracy. A universal supply and two modules are built-in the meter. The first module is a relay output and the second one is a tariff input (230 V AC). Meter has USB communication, it is calibrated to frequency 50, 60 Hz, finish is standard.

### *Ordering code example:*

**MC350 S ARNG S U U M T A T**



Type	Energy Accuracy Class	Voltage Input	Calibration Frequency	Aux Power Supply	Communication (COM1)	Input/Output 1&2	Input/Output 3&4	Finish	Current Connection
<b>MC3x0x</b>	<b>X</b>	<b>X</b>	<b>X</b>	<b>X</b>	<b>X</b>	<b>X</b>	<b>X</b>	<b>X</b>	<b>X</b>
									<b>T</b> Through Hole Transformer * <b>C</b> Screw Terminal Connector <b>A</b> Standard * <b>P</b> IP54 <b>H</b> HVE (Tropical Seal) <b>S</b> Ship Version <i>(not supported with PROFIBUS)</i> <b>D</b> 2x Digital input 230 V <i>(MC330, MC350, MC350H only)</i> <b>E</b> 2x Digital input 75 ... 110 V <i>(MC330, MC350, MC350H only)</i> <b>F</b> 2x Digital input 24 V DC <i>(MC330, MC350, MC350H only)</i> <b>T</b> 2x Tariff input 230 V <b>Z</b> 2x Tariff input 75 ... 110 V <b>N</b> Without * <b>A</b> 2x Analogue output <i>(MC350, MC350H with aux. power supply type H only)</i> <b>S</b> 2x Pulse output <b>M</b> 2x Relay output <i>(MC330, MC350, MC350H only)</i> <b>N</b> Without * <b>S</b> RS232 <b>D</b> RS485 <b>P</b> PROFIBUS + Service USB <i>(MC330, MC350, MC350H only; excludes Ship Version)</i> <b>L</b> M-Bus + Service USB <i>(MC350, MC350H only)</i> <b>U</b> USB <b>N</b> Without * <i>(MC320, MC330 only)</i> <b>M</b> Service USB <i>(MC320, MC330 only)</i> <b>U</b> 20 ... 300 V DC, 48 ... 276 V AC ( Uni. power supply - Full range) * <b>A</b> 57.7 V AC <b>B</b> 63.5 V AC <b>C</b> 100 V AC <b>D</b> 110 V AC <b>E</b> 230 V AC <b>F</b> 400 V AC <b>G</b> 500 V AC <b>I</b> 240 V AC <b>J</b> 440 V AC <b>H</b> 100 ... 265 V DC, 85 ... 265 V AC (Uni. power supply - High range) <i>(MC350, MC350H only)</i> <b>S</b> 50, 60 Hz * <i>Calibration frequency is valid only for measuring inputs and not for power supply!</i> <b>A</b> 400 Hz <b>B</b> 16.6 Hz <b>C</b> 200 Hz <b>ARNG</b> Autorange – 50 ... 500 V * <b>63V5</b> 57.7 ... 63.5 V <i>(MC320, MC330 only)</i> <b>110V</b> 100 ... 110 V <i>(MC320, MC330 only)</i> <b>240V</b> 230 ... 240 V <i>(MC320, MC330 only)</i> <b>S</b> Active cl.1 / Reactive cl.2 * <b>H</b> Active cl.0.5S / Reactive cl.2

- MC320** Energy meter
- MC330** Multimeter
- MC350** Network recorder
- MC350H** Network recorder with individual harmonics measurements

\* - Default ordering value

*Printed in Slovenia • Subject to change without notice • Version 8.01 / Feb-2017 • GB P 22.444.000*



**Iskra, d.d.**

Stegne 21

SI-1000 Ljubljana

Slovenia

Tel.: +386 1 51 31 000

Fax: +386 1 51 11 532

[www.iskra.eu](http://www.iskra.eu)

[info@iskra.eu](mailto:info@iskra.eu)